

Ref:

# FC Male--FC Female Tunable Attenuator

FC connector complies with JIS C5970-1998 F01 type fiber optical connector standard. ST adaptor complies with IEC 60874-10-3 BFOC/2,5 type fiber optic adaptor requirements.


## Features:

- ✧ Fully compatible with FC/PC connector/adaptor.
- ✧ Excellent return loss
- ✧ Perfect environmental stability and reliability
- ✧ Wide attenuation range
- ✧ Dual window (1310nm/1550nm)
- ✧ High resolution
- ✧ Easy installation & well package

## Applications:

- ✧ Telecommunications
- ✧ CATV
- ✧ Subscriber Loop
- ✧ FTTH
- ✧ LAN
- ✧ Optical Sensors
- ✧ Power Equalizers
- ✧ Laboratory Test
- ✧ Dynamic Gain Flattening

## Specifications:

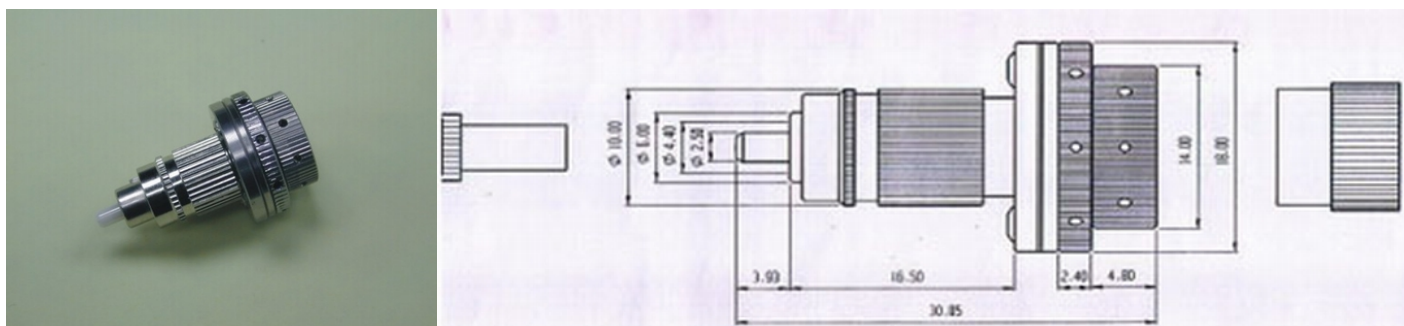

Fiber type	S.M. silica glass
Operation Wavelength	1310nm and 1550nm
Variable Range	0.3dB~30dB
Return Loss	~50dB
Operation Temperature	-40°C~+75°C
Storage Temperature	-40°C~+85°C

## Ordering information:

Minimum Order: Negotiable